THE TRISHNA INDO-FRENCH THERMAL INFRARED MISSION :

SCIENTIFIC TOPICS AND APPLICATIONS

J.-L. Roujean [1], B. Bhattacharya [2], P. Gamet [1], M.R. Pandya [2], G. Boulet [1], A. Olioso [3], S.K. Singh[2], M. V. Shukla[2], M. Mishra[2], S. Babu[16], P. V. Raju[15], C.S. Murthy[15], X. Briottet [4], A.Rodler [5], E. Autret [6], I. Dadou [7], D. Adlakha[2], M. Sarkar[2], G. Picard [8], A. Kouraev [7], C. Ferrari [9], B.M. Irvine [10], E. Delogu [11], T. Vidal [12], A. Al Bitar [1], P. Maisongrande [11], M. Sekhar[14], K. Mallick[13]

... in line with global change

Ecosystem stress	**Drought**	**Urban Heat Island**	**Sea Rise**
Flooding	**Extreme Events**	**Shrinking Ice Sheets**	**Retreat of Glaciers**

Pressure on water supply for irrigation !

(< 1ary renewable and 2ary freshwater resources)

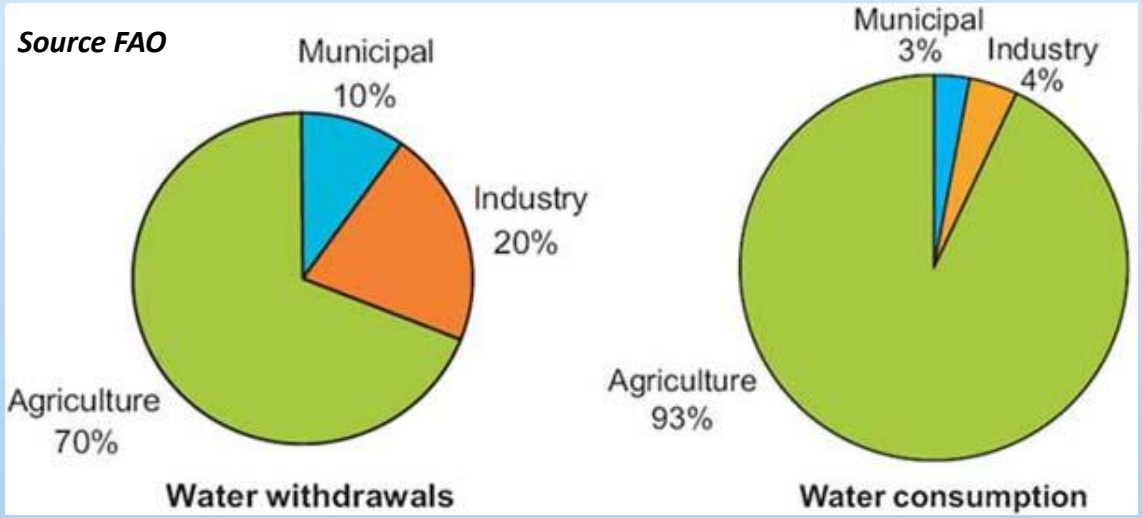

Agriculture : irrigation, livestock, aquaculture
Industry : drainage, wastewater, cooling, etc
Municipal : public distribution network, etc

Rapid increase of water consumption

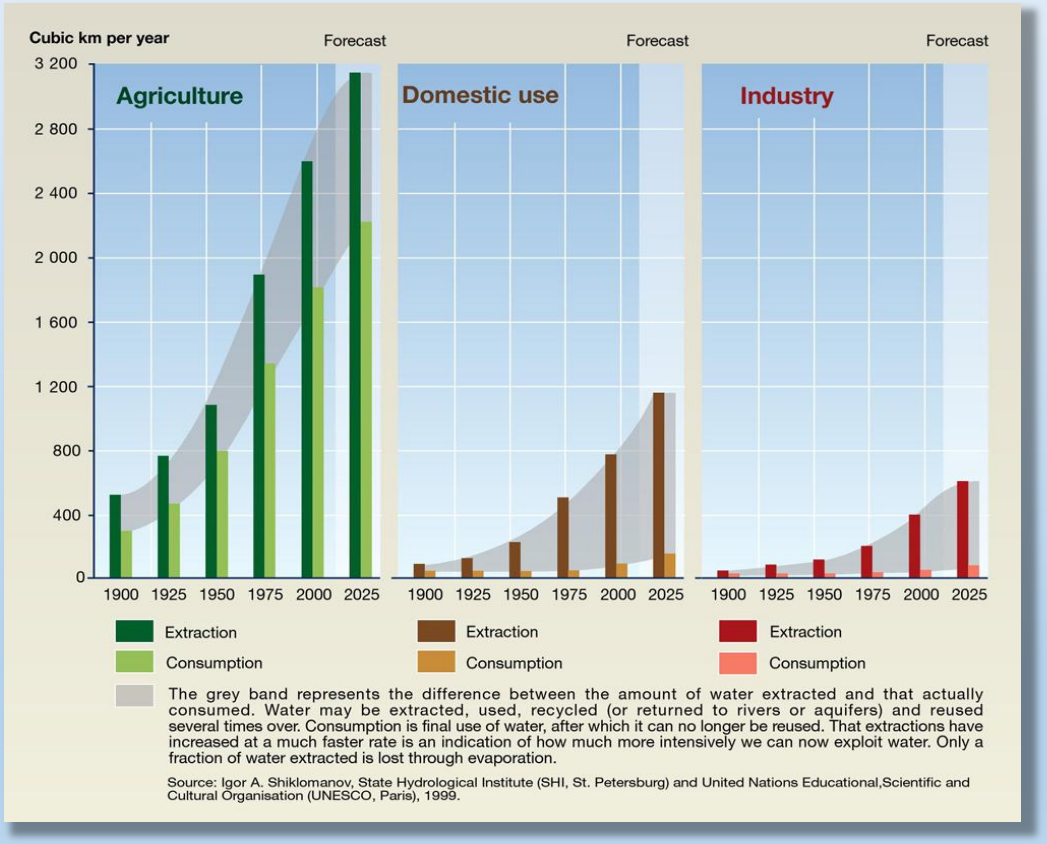

Trends in water use by sector (UNEP)

(http://www.unep.org/dewa/vitalwater/article43.html)

TRISHNA and the management of water resource

Change in temperatures

Change in rainfall regimes

Global scale
Regional scale
Plot scale

Access to freshwater reserves

Optimized management of water

Surface temperature and its dynamics

TRISHNA !

EvapoTranspiration

- Evaporation of water from soils
- Transpiration of plants
- Local climate

Frequent *AND* high-resolution measurements

TRISHNA

Computing EvapoTranspiration with remote sensing data

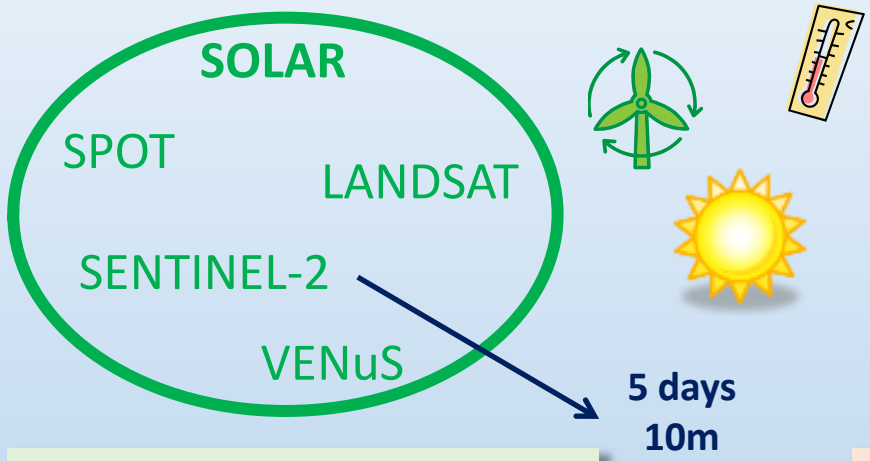

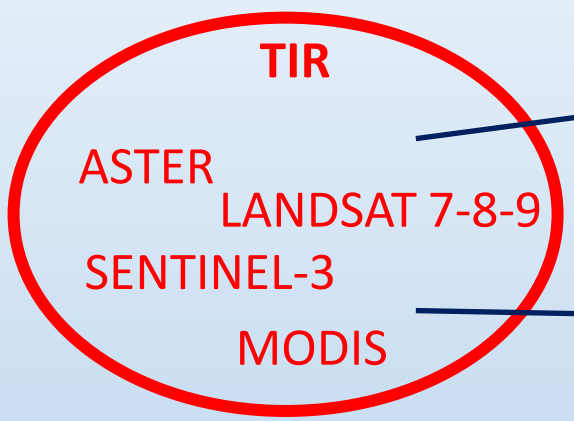

8-16 days ☹, 100m
- several rainfal events can occur in 16 days
- need for early stress detection

daily, **1km** ☹
- several fields within a km pixel

Vegetation development (vegetation indices NDVI)

Surface temperature as a signature of water stress

Water budget

Irrigation inversion

Energy budget

Maximum EvapoTranspiration

Actual EvapoTranspiration

Existing methods have some limitations:

- **Water budget large uncertainty on surface parameters and water inputs**
- **Energy budget: disagreggation from 1km to 100m with NDVI as scaling factor assumes unstressed vegetation**

→ **energy balance models must be forced at 100m scale every day or so !**

TRISHNA

- ISRO/CNES cooperation, launch in 2025 (5 years, fuel for 7 years)
- Scientific & operational applications
- Focus on **ecosystem stress and water use**
- Global coverage
- 4 TIR bands + 5 VNIR bands + 2 SWIR bands
- Revisit : 3 acquisitions at equator per 8 days period

  761km-8day orbit reducing hot spot constraints in intertropical zone
- ± 34° scan angle, 1030 km swath
- Nadir spatial resolution (VIS-NIR-SWIR-TIR):

  57 m for continental and coastal areas, binned at 1 km over open ocean
- Overpass time : 1 PM and 1 AM (+/- 15 mins)
- NeDT 0.2K
- Indo-French(*) Joint Science Team, synergies with ECOSTRESS, SBG, LSTM science & application teams

  (*) with other contributors
- Free and open data policy for worldwide scientific community

Learn more about TRISHNA !
https://labo.obs-mip.fr/multitemp/trishna
https://trishna.cnes.fr/en

System overview

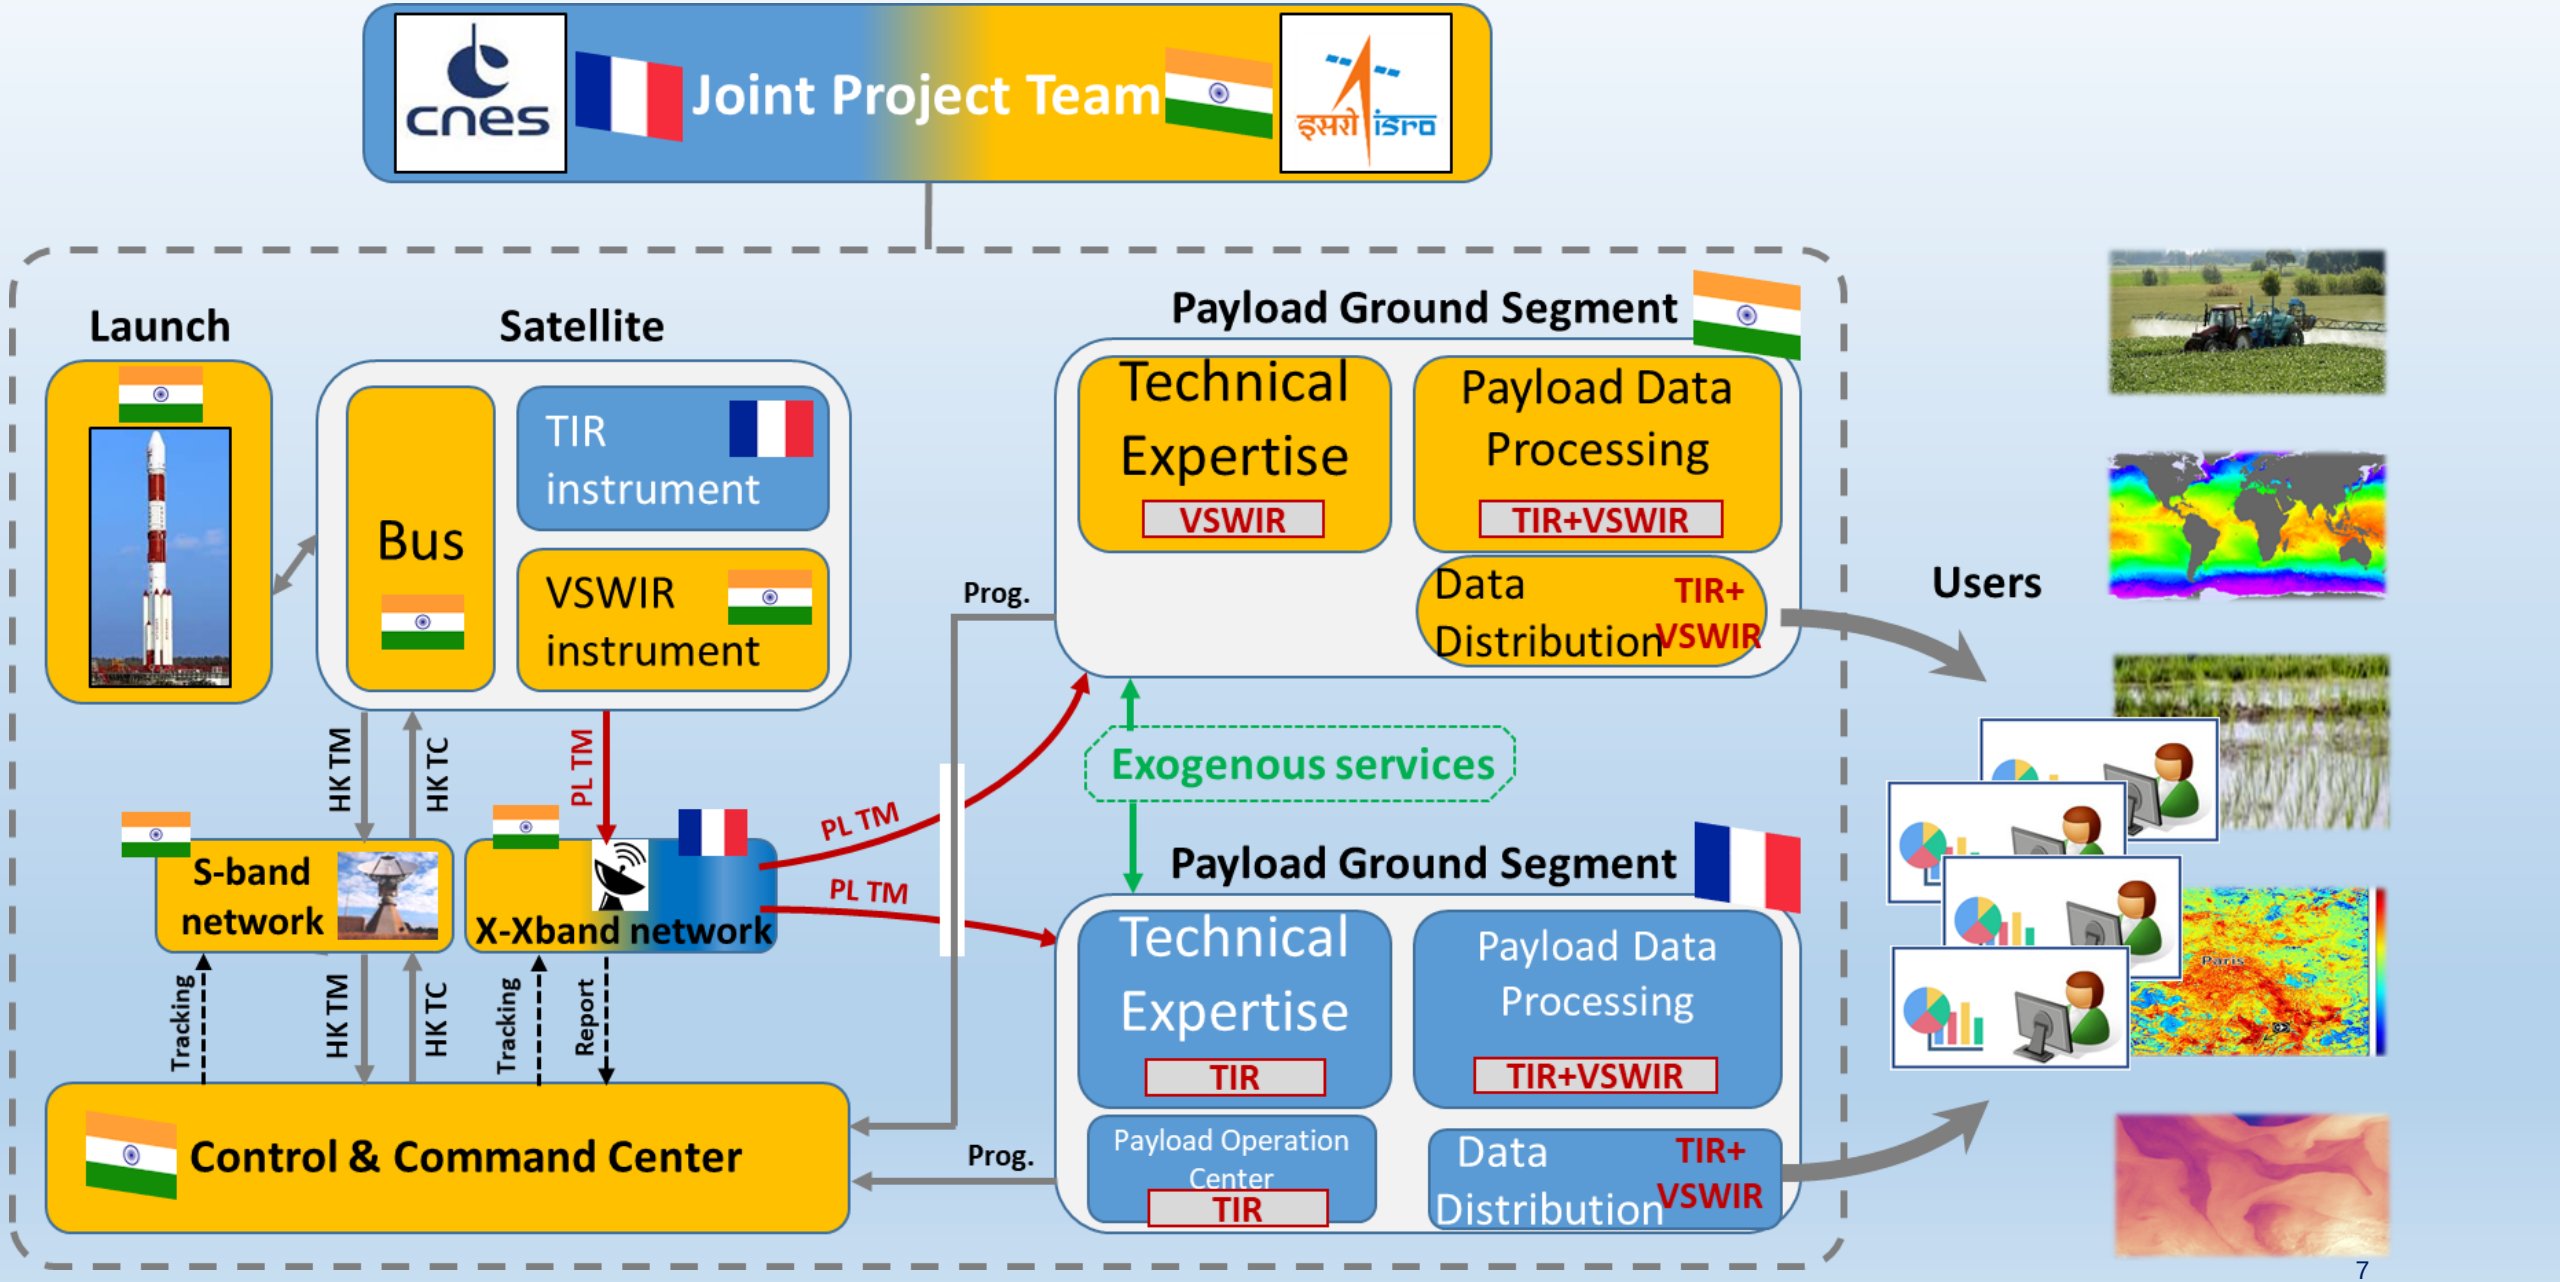

TRISHNA Bus development status

- Internal approval for S/C is in progress, within ISRO.
- Feasibility and Configuration studies completed.

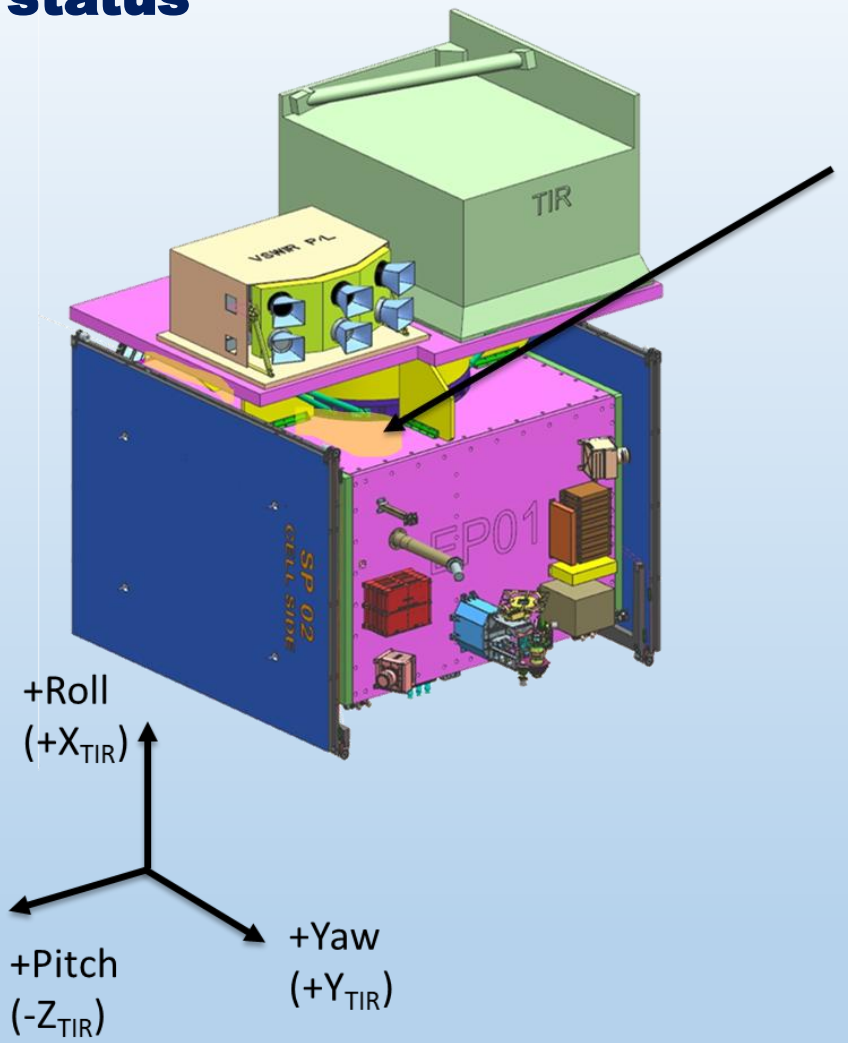

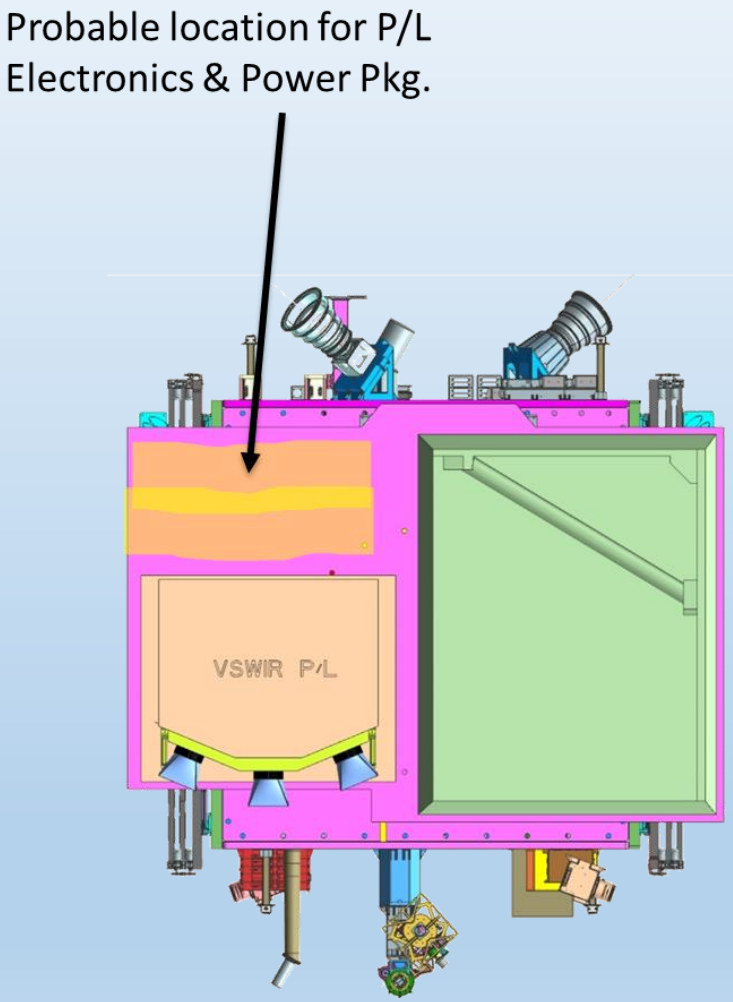

Instrument development schedule

TIR instrument development schedule (CNES)

- Instrument development (contract signed with ADS in March 2020
- Phase B started in June 2020
- Preliminary Design Review hold in June 2021
- Critical Design Review planned beginning 2023
- Instrument delivery planned in 2024

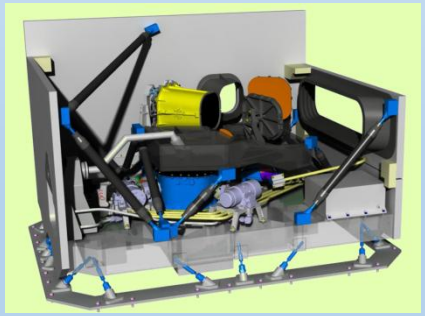

Developed by	AIRBUS DEFENCE AND SPACE
Acquisition	Across track scanner
Mass	210 kg
Spectral bands	4 TIR

VSWIR instrument development schedule (ISRO)

- MDR & PRR completed, Phase B in progress
- Detailed design & analysis in progress: optics, VNIR & SWIR detectors, electronics, opto-mechanical, thermal
- Spacecraft accommodation studies carried out.

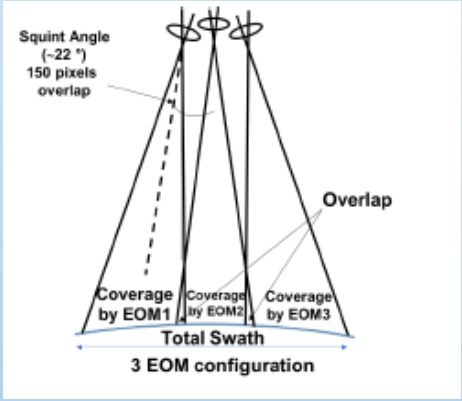

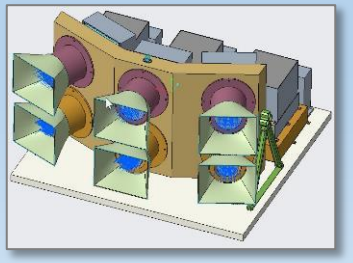

Developed by	**ISRO**
Optical Heads	6
Acquisition	Pushbroom
Mass	95 kg
VIS & NIR bands	5
SWIR bands	2

TRISHNA

TRISHNA and Ecosystem stress

Gilles Boulet / CESBIO et al.

ISRO-IISC-IIT-Other Academia

Evaporative Stress Index

Area

- **Irrigated Agriculture**
- **Rain-fed Agriculture**
- **Ecosystems**

What is at stake

- Optimize irrigation
- Manage consumption of water
- Arbitrate water savings
- Additional irrigation
- Monitor droughts and their impact on yield
- Diagnose vulnerable areas (fire, drought, frost, etc)

What TRISHNA brings

- ETR
- STRESS
- TEMPERATURE

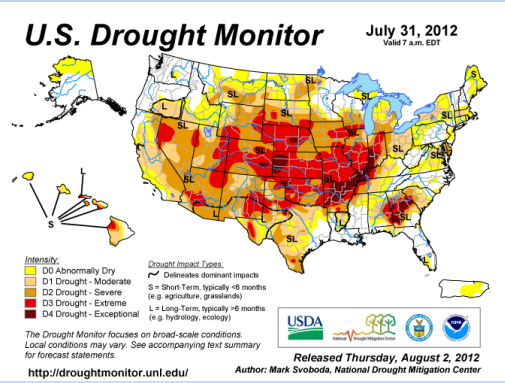

TRISHNA

Multi-layer transfer Models

(MuSICA, SCOPE)
Ogée et al., 2003
Van der Tol et al., 2009

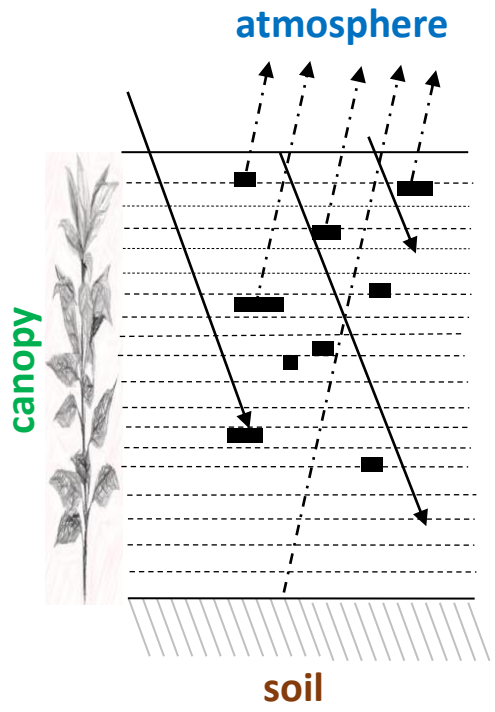

Single- and two-source resistance schemes

(Kustas et al., 2009)
Ras : soil-air aerodynamic resistance
Rac : vegetation-air aerodynamic resistance
Tsol : ground temperature
TC : canopy temperature
Hs : Sensible heat flux from the ground
Hc : Sensible heat flux from the canopy

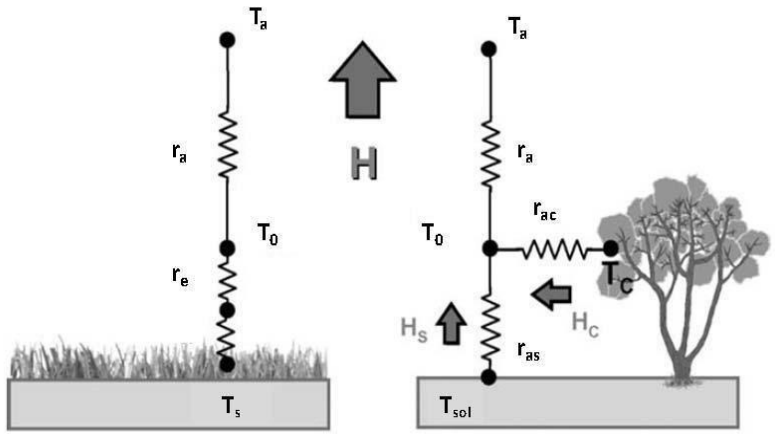

Contextual methods

S-SEBI calculates an evaporative fraction at any point C from temperature limits for each albedo class A and B

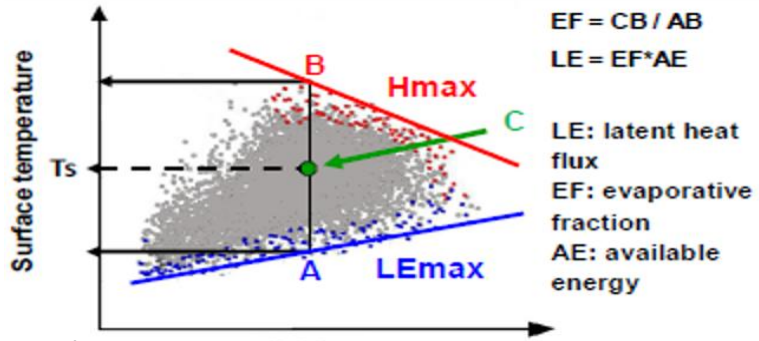

Roerink et al., 2000

Water Deficit Index model estimates a stress factor for a given point C according to temp. limits A and B (identified by range of vgt coverage deduced from solar domain data)

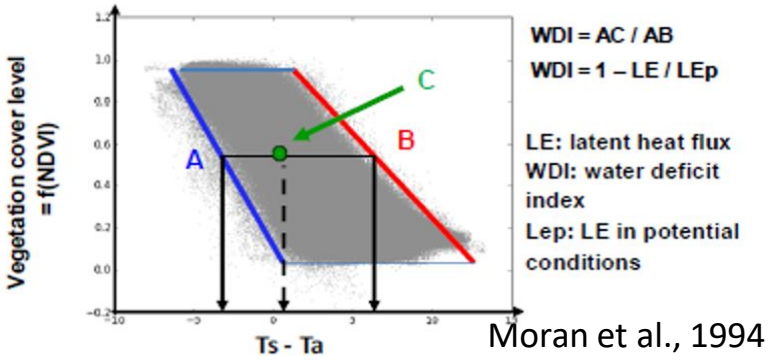

Moran et al., 1994

TRISHNA

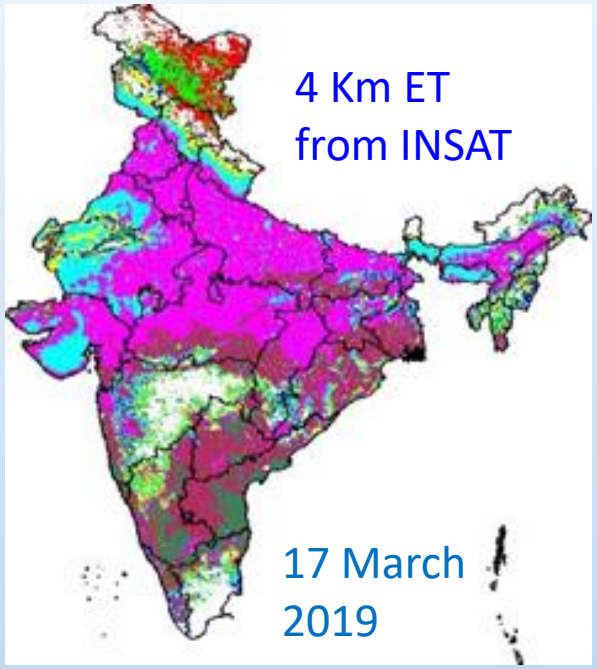

Evapotranspiration
(mm day^{-1})

- Mask/Cloud Cover
- 0.1-0.5
- 0.5-1.0
- 1.0-1.5
- 1.5-2.0
- 2.0-2.5
- 2.5-3.0
- 3.0-3.5
- 3.5-4.0
- 4.0-4.5
- 4.5-5.0
- 5.0-5.5
- 5.5-6.0
- 6.0-6.5
- 6.5-7.0

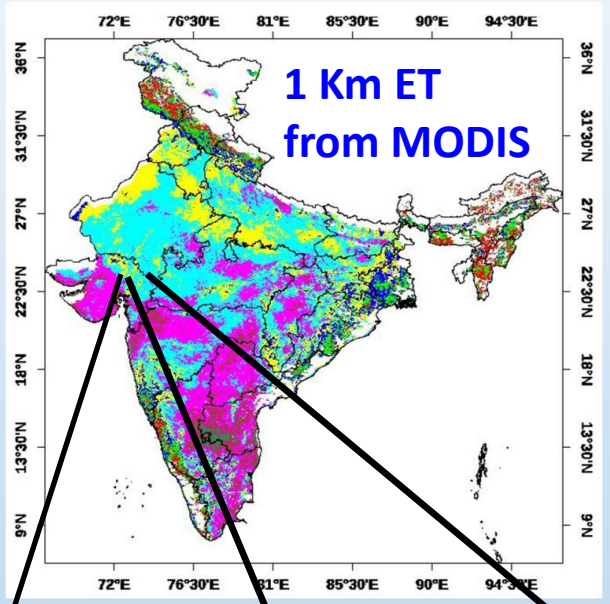

Evapotranspiration
(mm day^{-1})

- Mask/Cloud Cover
- 0.1-0.5
- 0.5-1.0
- 1.0-1.5
- 1.5-2.0
- 2.0-2.5
- 2.5-3.0
- 3.0-3.5
- 3.5-4.0
- 4.0-4.5
- 4.5-5.0
- 5.0-5.5
- 5.5-6.0

TIR resolution	% RMSE vs in situ flux measurements	
8 Km (Kalpana-1)	*Indian geo. satellites*	35%
4 Km (INSAT 3D)		25%
1 Km (MODIS)		20%
65m (ECOSTRESS)		12%

17th June

27th August

12th March

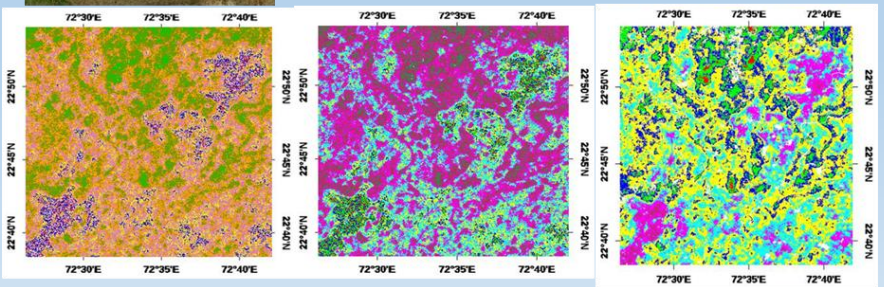

- 1.9-2.0
- 2.0-2.2
- 2.2-2.3
- 2.3-2.4
- 2.4-2.5
- 2.5-2.6
- 2.6-2.7
- 2.8-2.9
- 2.9-3.0
- 3.1-3.2
- 3.2-3.3
- 3.3-3.4
- 3.4-3.5
- 3.5-3.6
- 3.7-3.8
- 3.8-3.9
- 3.9-4.0

Sensitivity of flux retrievals to direction of view is reduced

Irrigated wheat (Morocco)

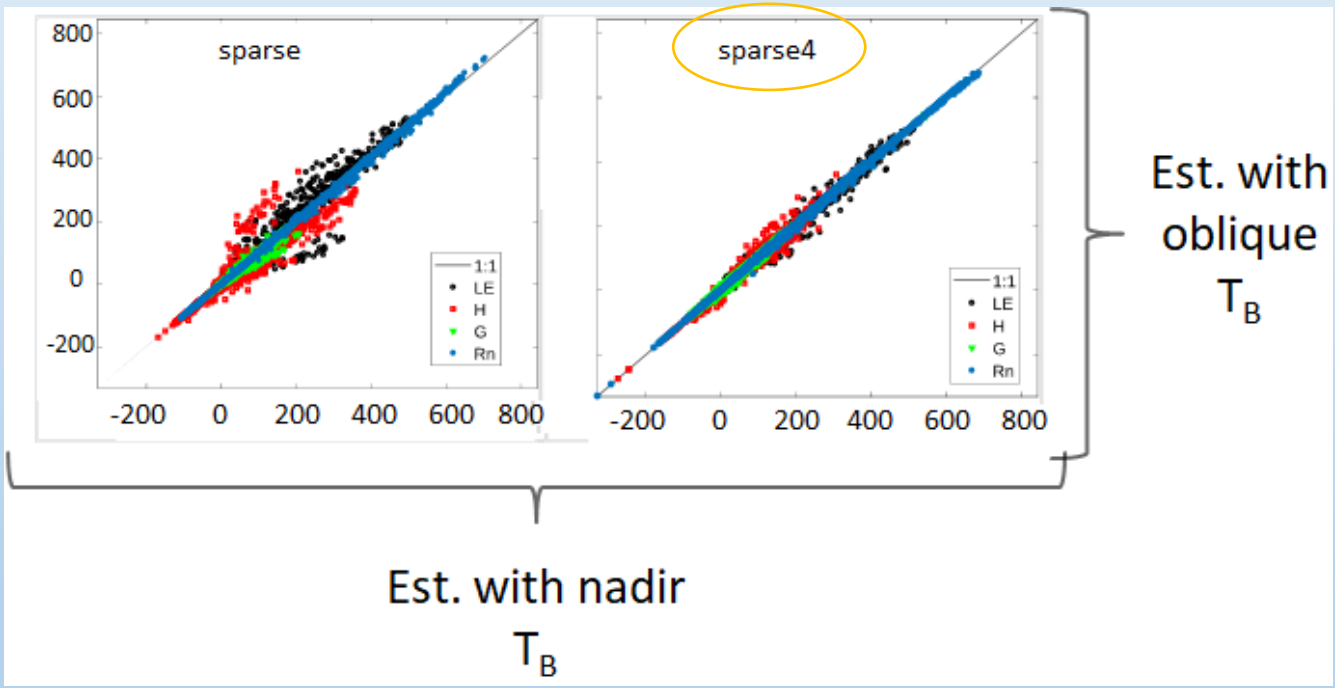

Improved LE partitioning

Orchard

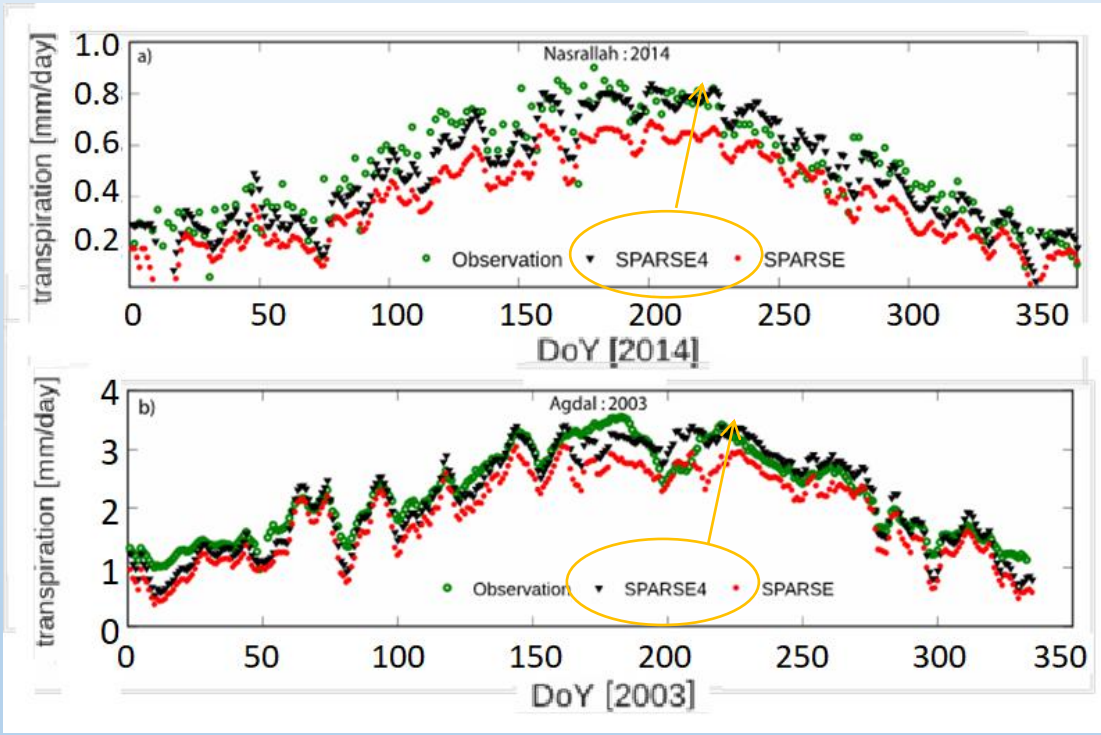

SPARSE model
(2 sources, soil and veg)

SPARSE4 model
(4 sources, sunlit/shaded for soil/veg.)

TRISHNA

Urban microclimate monitoring

Xavier Briottet / ONERA et al.

ISRO-Academia

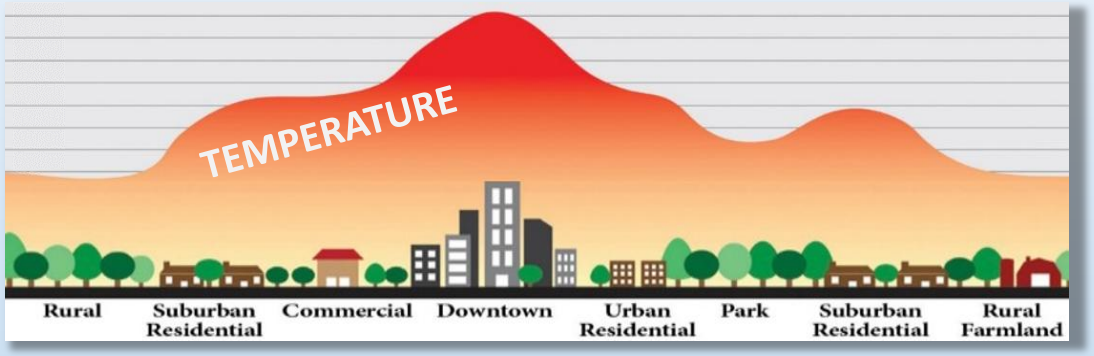

Urban Heat Island (UHI)

Air Temperature
Rugosity, Wind
Radiative trapping
Impermeability of the soils

Themes:
Hydrology, building heat model, urban climatology

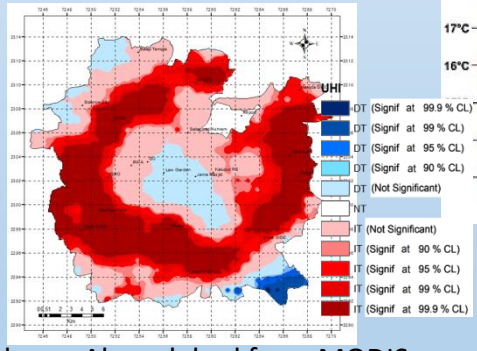

UHI trend over Ahmedabad from MODIS (*Chhabra et al, 2019*)

Connection with population health, comfort and safety

Urban population:
2008: 3.3 Billions
2050: 5 Billions

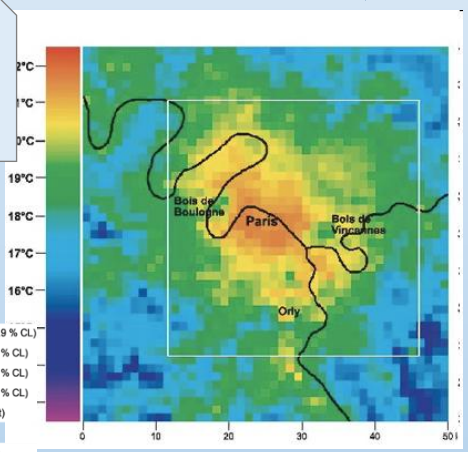

AVHRR Aug. 9, 2003 UHI over Paris (Do usset, 2007)

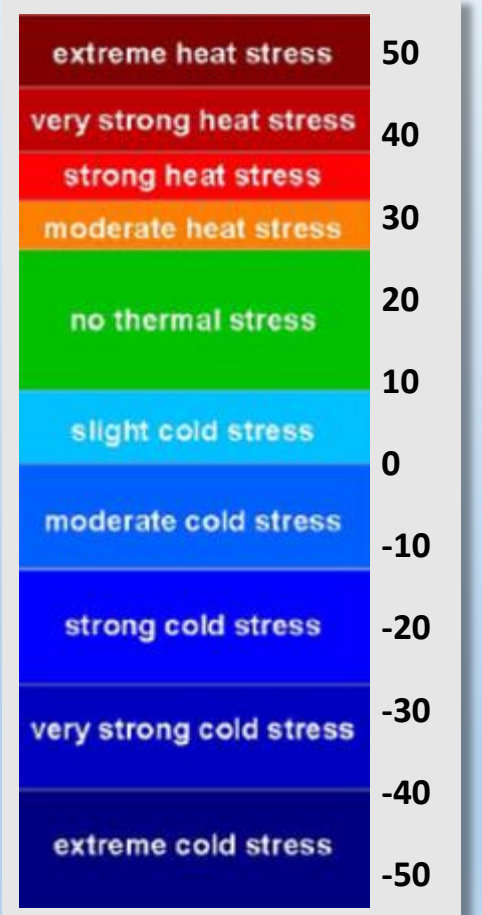

UTCI : Universal thermal confort index
www.utci.org

What TRISHNA brings:

- High revisit, global coverage
- LST, LSE
- Type of soil
- Rugosity

Exogenous data
+ Remote Sensing data
+ urban microclimatology model

Air Temperature

TRISHNA

Cryosphere

Ghislain Picard IGE

ISRO-Academia

Area

- Sea ice, ice sheets, ice caps
- Snow & Glaciers
- Permafrost & Seasonally frozen ground
- River & lake ice

What is at stake

- Snow-melt runoff and debris thickness estimation
- Snow cover change & metamorphism at sub-watershed scale
- Modelling snow energy fluxes
- Snow mass, Snow Water Equivalent (SWE), Snow depth

What TRISHNA brings

TEMPERATURE (Noon-night)

EMISSIVITY

Snow and Ice Albedo

Snow cover

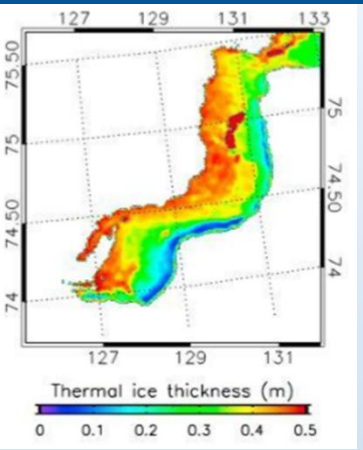

Debris cover glacier

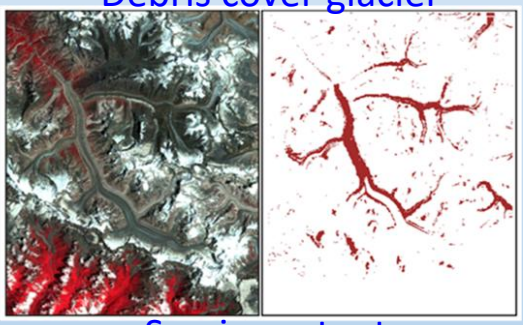

Sea-ice extent

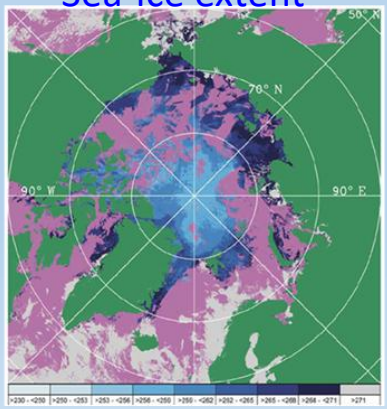

TRISHNA

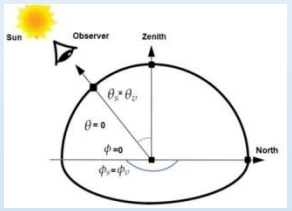

hot spot

	Measures	RL model
Urban	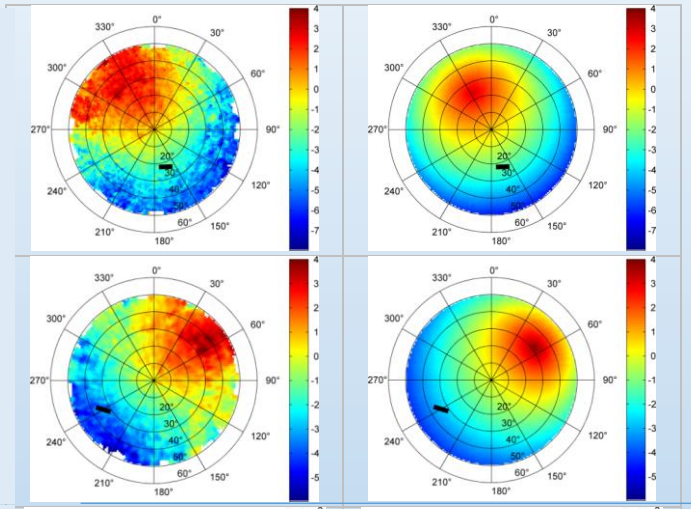	
Maritime Pines	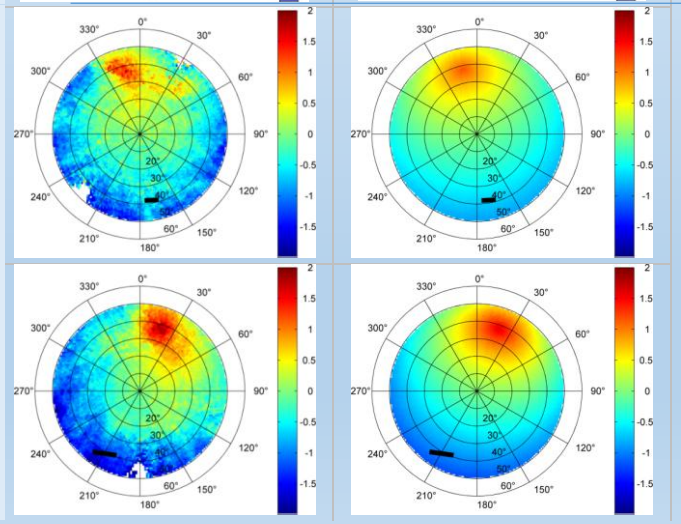	

(crédit J.P. Lagouarde & M. Irvine)

3 categories of hot spot model:

- ❑ **3D (urban, vegetation, ex: DART)**
  [Lagouarde et al., RSE 2010 and 2012]

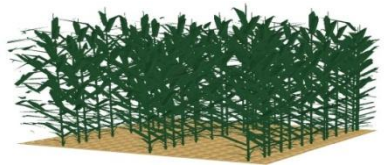

- ❑ **SCOPE 1D (multilayers)**
  [Duffour et al., 2015 and 2016a]

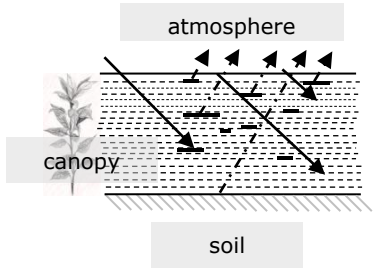

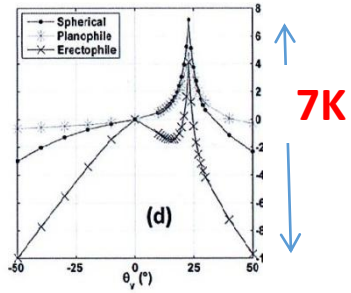

- ❑ **Parametric (Roujean-Lagouarde)**
  [Duffour et al., 2016b]

TRISHNA hot spot observations at Bangalore

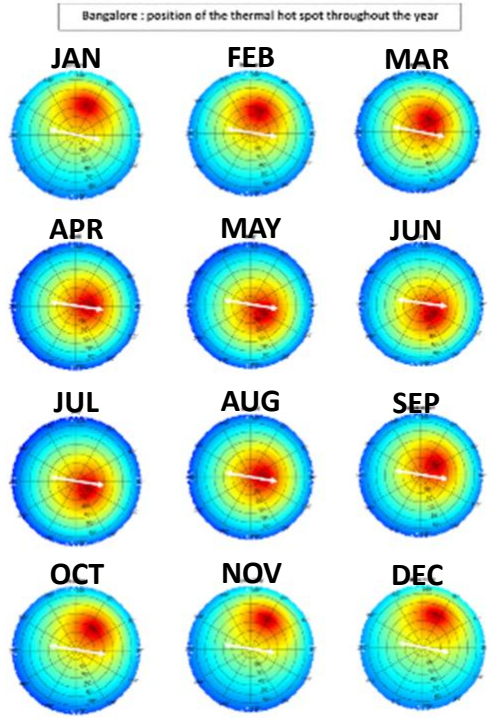

Preliminary In-Orbit Calibration strategy for the TIR instrument

- CNES maintains a **multi-mission** L1 calibration and L2 validation **permanent site**
- **La Crau** site : low cloud coverage & high spatial homogeneity (& easy access !)

✓Several meetings between CNES and NASA/JPL

✓Installation of the JPL radiometer planned beginning of next year

✓On-going definition of the CNES permanent instrumentation

TRISHNA

Cal-Val activities

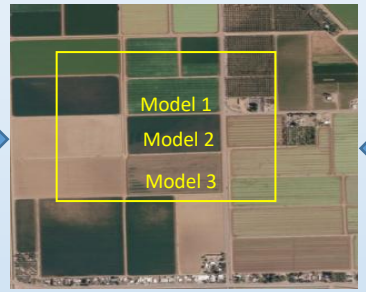



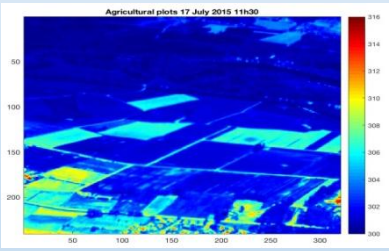

Simplified Directionel, Evapotranspiration Models

3D Directionel, Turbulence Model Upscaling

Upscaling Atmosphéric transfer ..

Research Quality data

Calibration data

Targeted Research Quality data

LST Validation Sites

Bias
RMSE
Correlation
Nash criteria
Consistency

LST Super-Sites

Downscaling

Signal integration

LST Field Campaigns

Landscape scale

TRISHNA footprint

Coll. : NASA/JPL, ESA, etc

TRISHNA validation sites – Spatial/Temporal Variability (1/2)

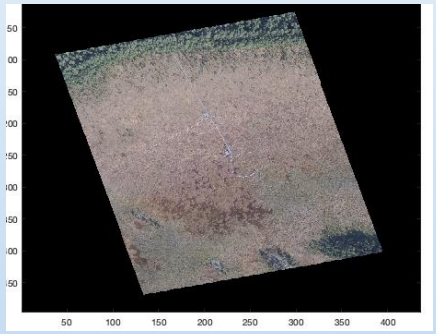

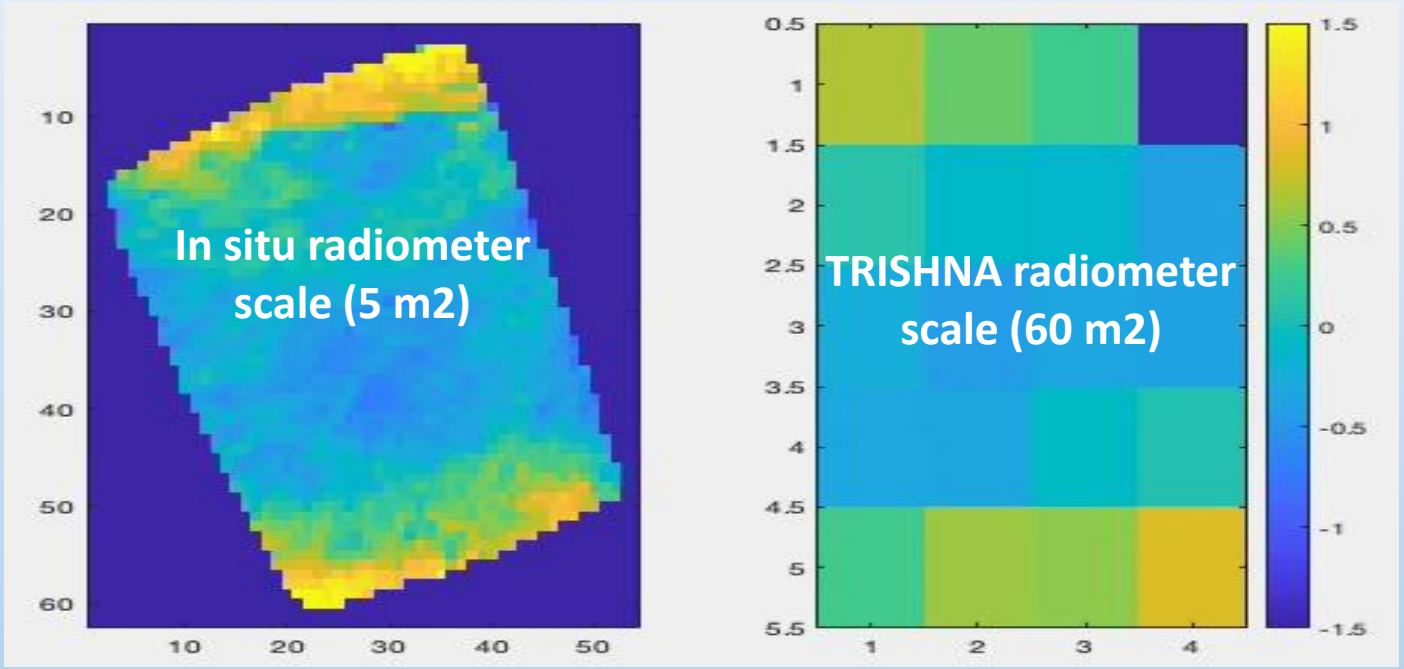

Spatial/ Temporal differences can be of several degrees K !

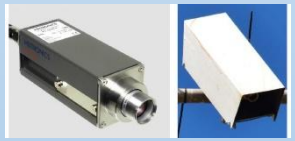

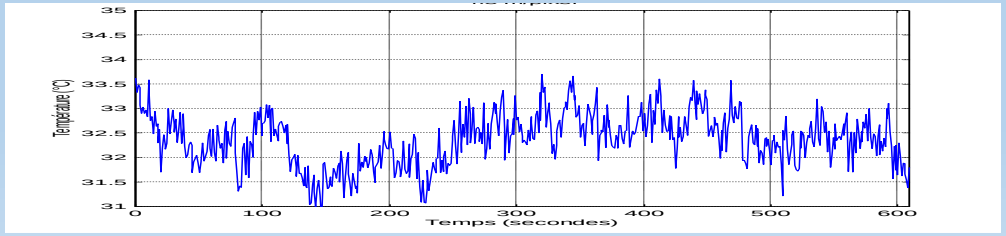

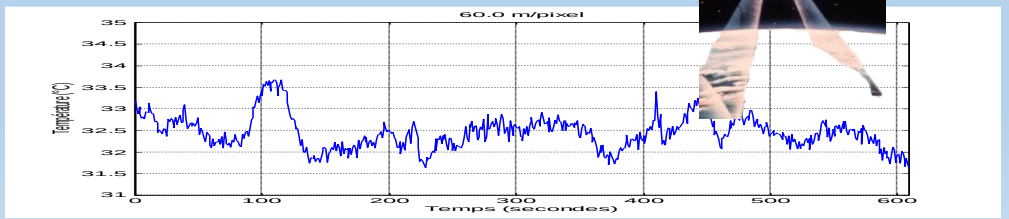



Instantaneous satellite images must be compared to in situ small footprint field measurements

TRISHNA validation sites – Spatial/Temporal Variability (2/2)



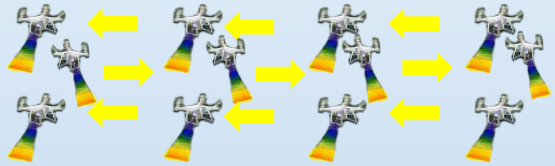

Compare the TRISHNA Pixel with several *in situ radiometer pixels*

Test Spatial/Temporal integration with several radiometers or using a UAV integrating radiometer

Initial results indicate that the UAV solution is extremely efficient at reducing in situ measurement variability related to turbulence

TRISHNA

Royaume-Uni
La Manche
Belgique
Allemagne
Luxembourg
Suisse
Italie
Espagne
Andorre
Océan Atlantique
Méditerranée
Cherbourg
Lille
Rouen
Amiens
Caen
Honfleur
PARIS
Reims
Strasbourg
Nancy
Brest
Jersey
Nantes
Auxerre
Dijon
Besançon
Poitiers
Bourges
Île de Ré
La Rochelle
Île d'Oléron
Rochefort
Limoges
Clermont-Ferrand
Lyon
Annecy
Bordeaux
Toulouse
Montpellier
Nîmes
Avignon
Biarritz
Perpignan
Ports de mer
100 km
© Jacques Leclerc 2011

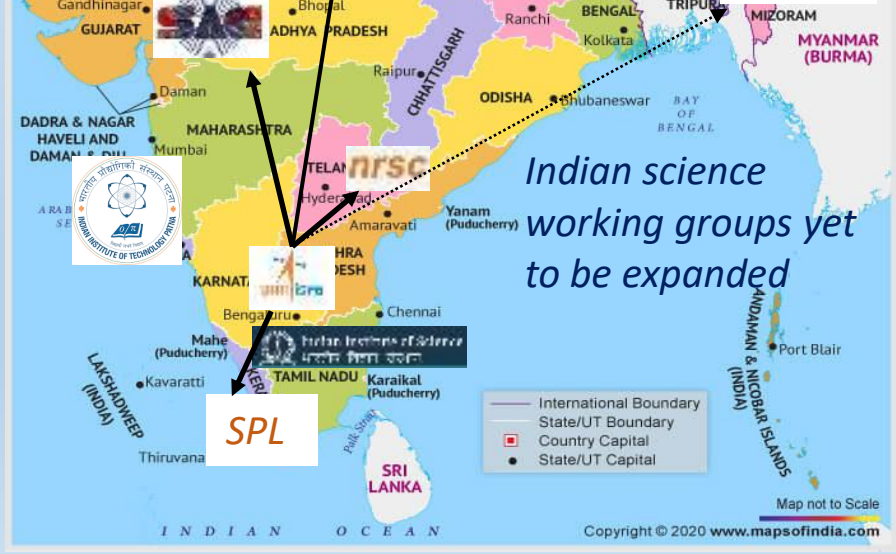
INDIA
States and Union Territories
INDIA FLAG
भारत
IIRS
NESAC
SPL
Indian science working groups yet to be expanded
PAKISTAN
CHINA (TIBET)
NEPAL
BHUTAN
BANGLADESH
MYANMAR (BURMA)
SRI LANKA
INDIAN OCEAN
International Boundary
State/UT Boundary
Country Capital
State/UT Capital
Map not to Scale
Copyright © 2020 www.mapsofindia.com

TRISHNA Distributed Products

All products also include
- *quality flags*
- *uncertainty assessment*

Level 1c

✓ TOA reflectances x7 VNIR/SWIR bands
✓ TOA radiances x4 LWIR bands
✓ Cloud mask
Radiometrically and geometrically calibrated
Orthorectified and resampled on a uniform spatial grid (Sentinel-2 tiles, Copernicus DEM)

Level 2a

✓ Surface reflectances *x5 VNIR/SWIR bands*
✓ LST, SST, LSE *x4 bands*
✓ Cloud mask, TWVC, AOT, Scene classification

Level 2b

✓ Vegetation variables (NDVI, fAPAR, GAI, FCV)
✓ Evaporative Fraction
✓ Instantaneous & Daily evapotranspiration

LST: LSTM/SBG/TRISHNA joint activities

Synergy with SBG and LSTM to have consistent missions in order to increase, in particular, the revisit by a combined use of LSTM, TRISHNA, SBG

- TRISHNA representatives at MAG LSTM
- LSTM/SBG representatives at TRISHNA Science Team meetings and workshops
- Regular meetings of LSTM/SBG/ TRISHNA project teams to harmonize work
- Coordinated participation in international conferences (ESA LPS, IGARSS, GEOGLAM, etc)